
## GRANOSICHTER

## Pre-Cleaning /Cleaning Separator

Machine utilized for the pre-cleaning and cleaning of grains. It is composed of a central oscillating body which contains aluminum frame groups pneumatically fixed with a sifting surface of 24 sq. m. The machines consists of a decantation group at the inlet and a suction channel at the outlet.



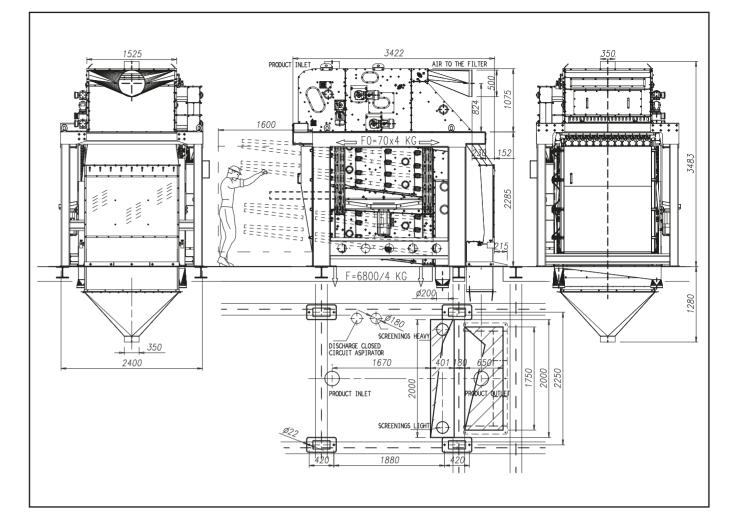

| Model     | Mq | * Capacity t/h<br>silos | Aspiration m <sup>3</sup> | Main drive motor | Motor Closed circuit aspirator | Gear motor  | Weight Kg |
|-----------|----|-------------------------|---------------------------|------------------|--------------------------------|-------------|-----------|
| GS 24/150 | 24 | 200                     | 200                       | Kw 4             | Kw 2x0,55                      | 3 x 0,55 Kw | 6500      |

\* Soft wheat 0,75t/m<sup>3</sup> Units = mm