


SPR

Pre-cleaning Separator

Machine is utilized for the pre-cleaning of cereals and the separation of coarse impurities. Reduces the wear on the subsequent machines in the production process. The cylinder rotation is obtained by means of a gear motor.

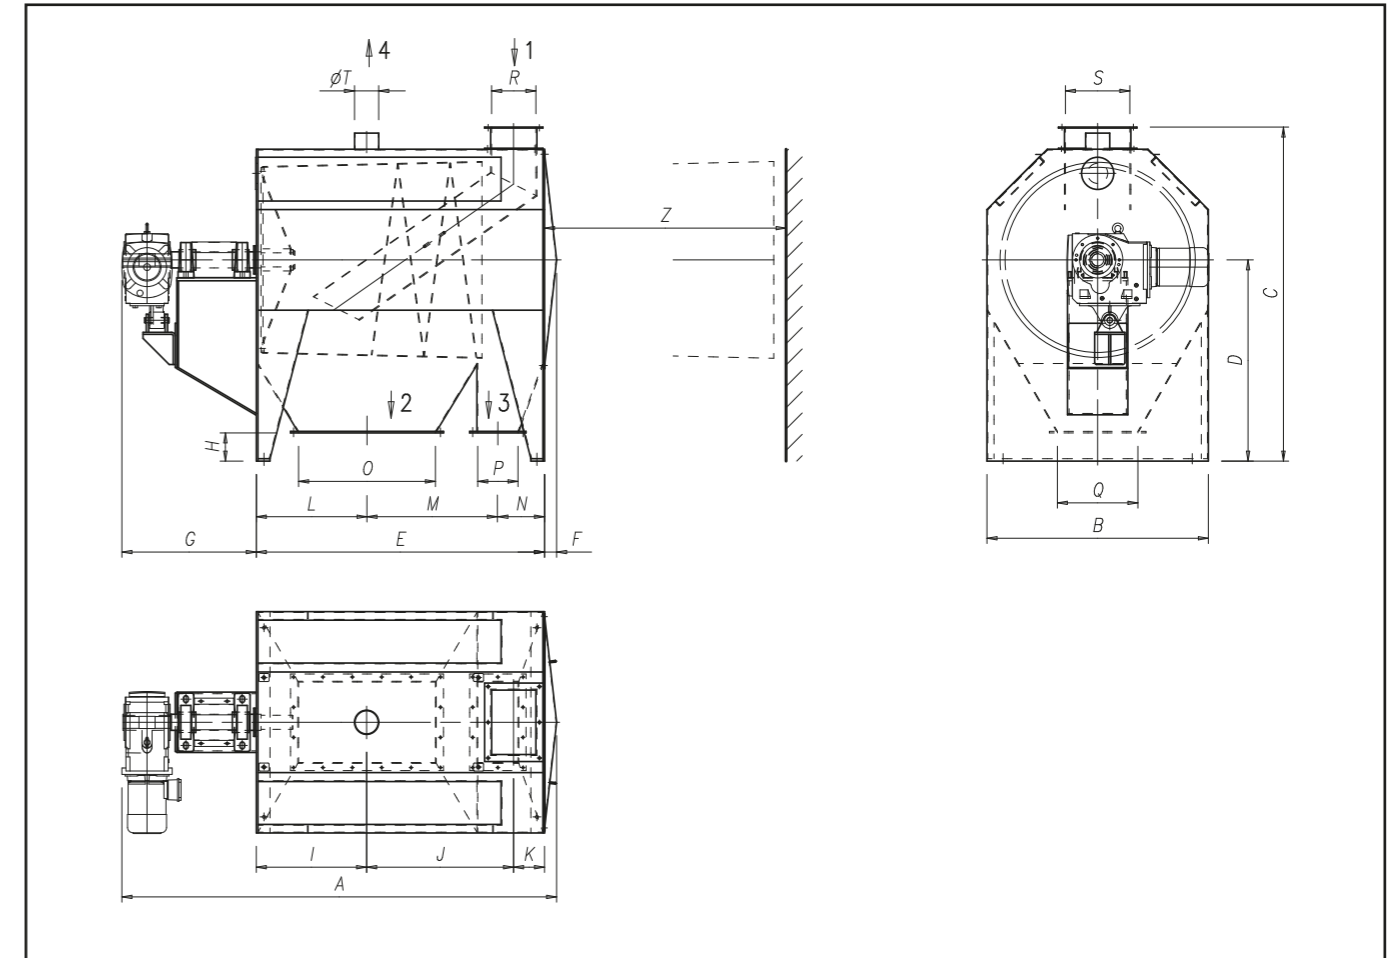

- ① Product Entry
- ② Product Exit
- ③ Impurity Discharge
- ④ Suction

Model	Frame	A	B	C	D	E	F	G	H	I	J	K	L	M
SPR 200	ø970x1090	2130	1100	1660	1000	1430	60	640	140	548	730	152	550	650
SPR 400	ø1230x1390	2520	1380	1825	1050	1810	70	640	50	730	880	200	705	830
SPR 600	ø1650x2090	3580	1800	2150	1150	2710	100	770	50	1070	1350	290	1050	1260

Model	N	O	P	Q	R	S	T	Z	Air m ³ /1"	Motor Kw	*Capacity T/h	Weight
SPR 200	230	680	200	400	220	320	150	1200	12	0.75	200	850
SPR 400	275	900	250	400	320	460	200	1500	15	1.1	400	1300
SPR 600	400	1700	350	700	500	500	200	2200	20	3	600	2100

* Soft wheat 0,75t/m³
Units = mm